INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
SPLASH GUARDS **2-DOOR: P/N 08P00-S82-100** **4-DOOR: P/N 08P00-S84-100**	**1999 ACCORD** **2- AND 4 -DOOR**	**All 20017** Issue Date **SEP 1998**

PARTS LIST

Left front splash guard



Right front splash guard



Left rear splash guard



Right rear splash guard



4 Spring nuts

2 Grommets

6 Self-tapping screws

TOOLS REQUIRED

Stubby Phillips screwdriver
Phillips screwdriver

INSTALLATION

NOTE:

- In these instructions, the illustrations show the left splash guards being installed. The same procedure applies to installing the right splash guards.
- Make sure the area to be covered is clean and has been waxed with a high-quality paste wax.

Installing the Front Splash Guards

1. Turn the steering wheel all the way counterclockwise to provide access to the left front fenderwell.

2. Remove the three self-tapping screws securing the inner fender to the fenderwell. Position the left splash guard on the fenderwell, and reinstall the three self-tapping screws. Tighten the screws securely.

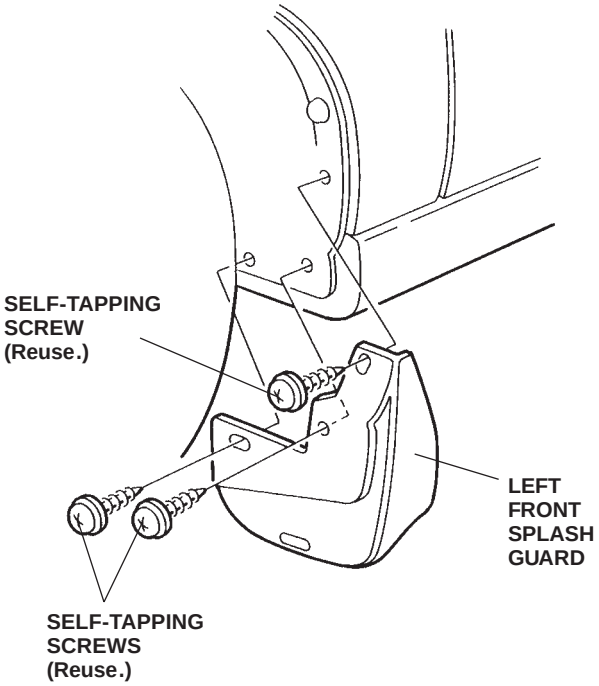

3. Turn the steering wheel all the way clockwise, and repeat step 2 to install the right front splash guard.

1998 American Honda Motor Co., Inc - All Rights Reserved.

Installing the Rear Splash Guards

4. Slide two spring nuts over the dimpled areas of the rear bumper. Press a plastic grommet into the hole in the fenderwell.

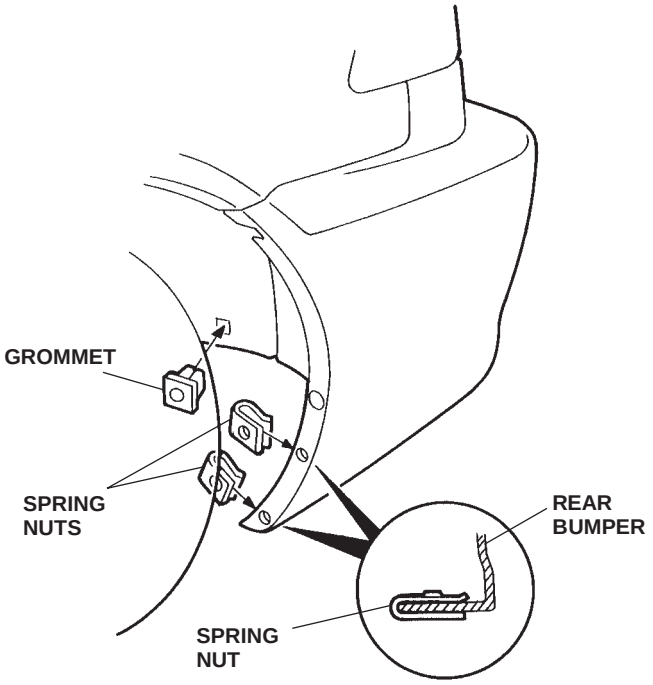

5. Position the left rear splash guard on the fender and bumper, and install three of the self-tapping screws provided. Tighten the screws securely.

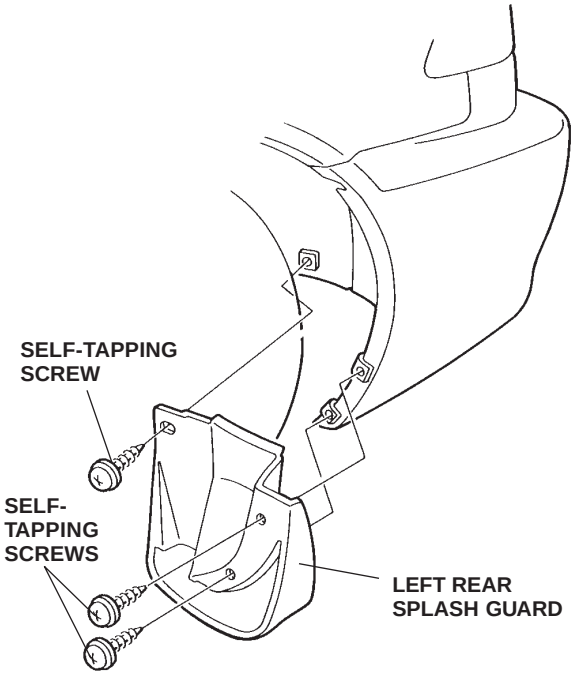

6. Repeat steps 4 and 5 to install the right rear splash guard.

All 20017 (9809)
1998 American Honda Motor Co., Inc - All Rights Reserved.